

# AC154 Series

Low Cost Accelerometer, Side Exit Connector, 100 mV/g



VIBRATION ANALYSIS HARDWARE



Limited Availability



## Product Features

Low Cost Side Exit Sensor


Economical Way to Trend Machinery

- ▶ ±50g, Peak Dynamic Range
- ▶ 0.5 - 7000 Hz (30 - 420,000 CPM) Frequency Response
- ▶ Standard 2 Pin MIL Connection

AC154-1A 2 Pin Connector	AC154-2C Integral Cable	AC154-3C Armored Integral Cable	AC154-6C Heavy Duty Armored Integral Cable																														
<table border="1"> <tr> <th>Connector Pin</th> <th>Polarity</th> </tr> <tr> <td>A</td> <td>(+) Signal/Power</td> </tr> <tr> <td>B</td> <td>(-) Common</td> </tr> </table> <p><b>Stock Product</b></p>	Connector Pin	Polarity	A	(+) Signal/Power	B	(-) Common	<table border="1"> <tr> <th>Conductor</th> <th>Polarity</th> </tr> <tr> <td>Red</td> <td>(+) Signal/Power</td> </tr> <tr> <td>Black</td> <td>(-) Common</td> </tr> <tr> <td>Shield</td> <td>Cable Drain Wire</td> </tr> </table> <p><b>Built To Order</b></p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr> <th>Conductor</th> <th>Polarity</th> </tr> <tr> <td>Red</td> <td>(+) Signal/Power</td> </tr> <tr> <td>Black</td> <td>(-) Common</td> </tr> <tr> <td>Shield</td> <td>Cable Drain Wire</td> </tr> </table> <p><b>Built To Order</b></p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire	<table border="1"> <tr> <th>Conductor</th> <th>Polarity</th> </tr> <tr> <td>Red</td> <td>(+) Signal/Power</td> </tr> <tr> <td>Black</td> <td>(-) Common</td> </tr> <tr> <td>Shield</td> <td>Cable Drain Wire</td> </tr> </table> <p><b>Built To Order</b></p>	Conductor	Polarity	Red	(+) Signal/Power	Black	(-) Common	Shield	Cable Drain Wire
Connector Pin	Polarity																																
A	(+) Signal/Power																																
B	(-) Common																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																
Conductor	Polarity																																
Red	(+) Signal/Power																																
Black	(-) Common																																
Shield	Cable Drain Wire																																

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC154	M/AC154	<b>Environmental</b>		
Sensitivity (+20%)	100 mV/g		Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	30-420,000 CPM	0.5-7000 Hz	Maximum Shock Protection	5,000 g, peak	
Dynamic Range	± 50 g, peak		Electromagnetic Sensitivity	CE	
<b>Electrical</b>			Sealing	Welded, Hermetic	
Settling Time	<2.5 seconds		<b>Physical</b>		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	14 µg/√Hz		Weight	5.1 oz	145 grams
Spectral Noise @ 100 Hz	2.3 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	2 µg/√Hz		Mounting	1/4-28	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,320,000 CPM	22000 Hz
Case Isolation	>10 <sup>8</sup> ohm		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
			Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate	CA10	

## Typical Frequency Response

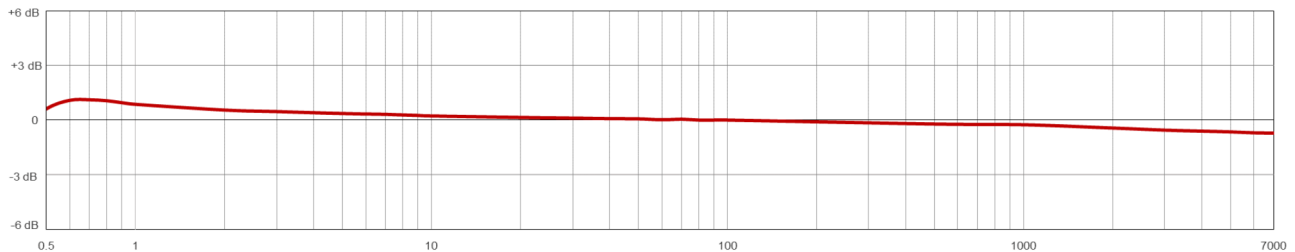

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900